

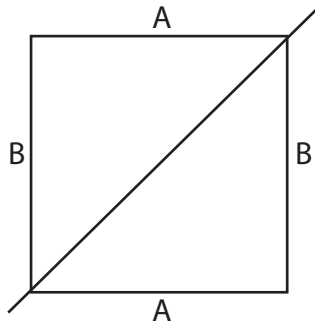


Bias Binding Tutorial  
Originally idea from @anjeannetteK  
tutorial written by Sherry Kirkham

CUT 45 DEGREE ANGLE THROUGH SQUARE


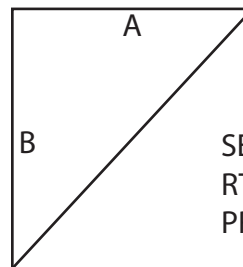


LABEL A & B

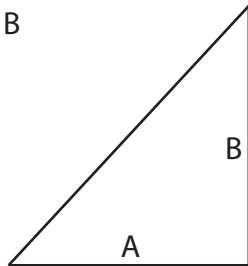


SEW B TO B (OR A TO A)  
RT SIDES TOGETHER  
PRESS OPEN

YOU WILL END UP WITH THIS

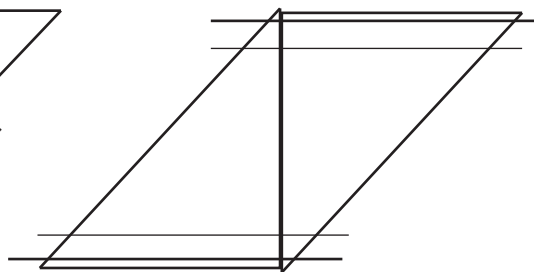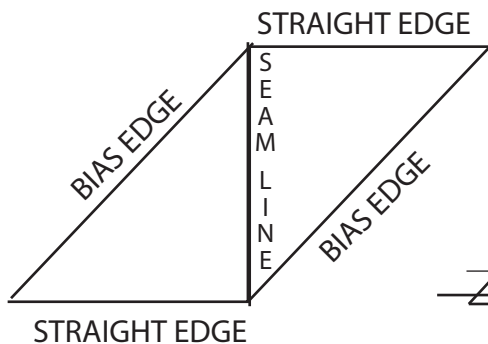

MARK 1/4 INCH  
FROM STRAIGHT GRAIN EDGE  
ON BOTH ENDS WITH PEN

WITH HERA MARKER  
MARK A CREASE ONE INCH AWAY  
FROM THAT LINE ON BOTH  
STRAIGHT OF GRAIN EDGES

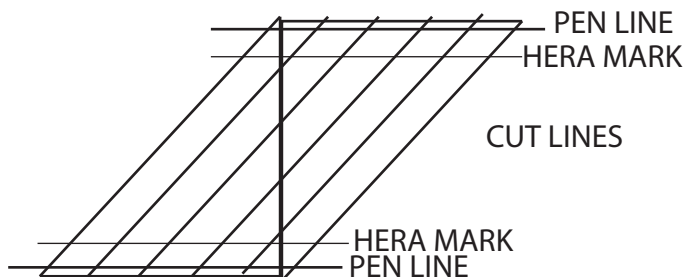

THEN TAKE YOUR RULER  
LINE IT UP ON THE BIAS EDGES  
AT THE CHOSEN WIDTH OF YOUR BINDING  
AND MARK ACROSS THE BIAS WIDTH  
FROM STRAIGHT EDGE TO STRAIGHT EDGE

THEN YOU ARE GOING TO TAKE YOUR RULER  
AND ROTARY CUT ON THE MARKS UP TO  
BUT NOT THRU THE CREASES YOU MADE WITH  
THE HERA MARKER

THEN YOU ARE GOING TO PIN RS TOGETHER BEING CAREFUL TO MATCH POINTS  
BUT REMEMBER TO OFFSET YOUR FIRST MARK  
DO NOT PIN THE FIRST MARK TO FIRST MARK  
PIN IT TO SECOND MARK.  
SEW SLOWLY AND TAKE YOUR TIME  
THEN PRESS SEAM OPEN  
AND THEN TAKE YOUR TUBE AND CUT ALONG THE GUIDE LINES  
CREATED WHEN YOU MARKED THE WIDTH OF BINDING  
AND YOU SHOULD END UP WITH A LONG STRIP  
OF CONTINUOUS BIAS BINDING  
WITHOUT ALL THE TEDIOUS CUTTING